

# ROOFSEAL FASTENERS


Roofing  
Solutions  
Under  
One Roof



**ROM**  
Since 1990

## FASTENER APPLICATION

### Crest Fixing



M.S. Purlin 1-6mm

Light Gauge 0.4 - 2mm


DS 650 HW  
DS 650 HWR

DS 650 SS HW  
DS 650 SS HWR

DS 665 HW  
DS 665 HWR

DS 665 SS HW  
DS 665 SS HWR

### Cladding/Valley Fixing

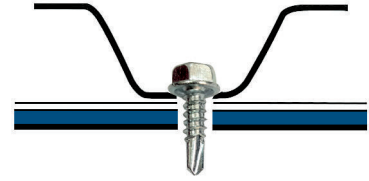


Drilling Capacity < 6mm

DS 516 HO  
DS 516 HOR

DS 520 HO  
DS 520 HOR

### Clip Fixing




M.S. Purlin 1-6mm

Light Gauge 0.4 - 2mm

DS 525 PH  
DS 525 PHR

DS 525 SS PH  
DS 525 SS PHR

### Side Lap Fixing (Stitching)

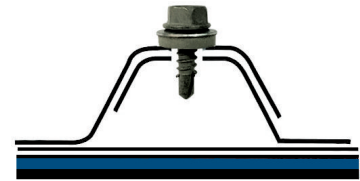

Drilling Capacity < 2mm

516 BK HWR

## CORROSION CLASS CATEGORIES


**Class 1** - for general internal use, most drywall and chipboard screws are in this category

**Class 2** - for general internal use, where significant levels of condensation occur. Electroplated ZINC is generally used to meet this class.

**Class 3** - for general external use in mild and moderate industrial and mild marine applications. The Class is intended for roofing and cladding screws in standard applications. Fastener compliance used to be achieved by accelerated laboratory testing.

**Class 4** - for external use in moderate and severe marine environments, classified in accordance with ISO 9223 as generally between 100m from the beach front to approximately 300m inland

### INSTALLATION GUIDELINE

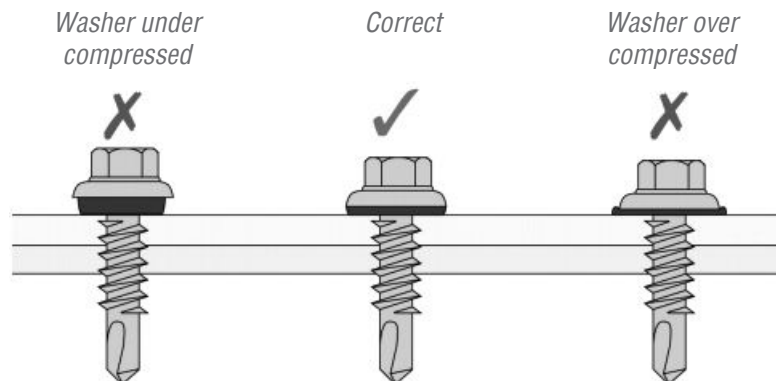

**ROOFSEAL RESOURCES (M) SDN. BHD.** (802531-A)

No. 1-A, Jalan 1/7, Seksyen 1, Bandar Teknologi Kajang, 43500 Semenyih, Selangor Darul Ehsan, Malaysia.  
Tel: 603-8723 4776 (H/Line) Fax: 603-8723 4775 E-mail: enquiry@roofseal.com.my Website: www.roofseal.com.my