


ROOFSEAL EURO762

Roofing
Solutions
Under
One Roof

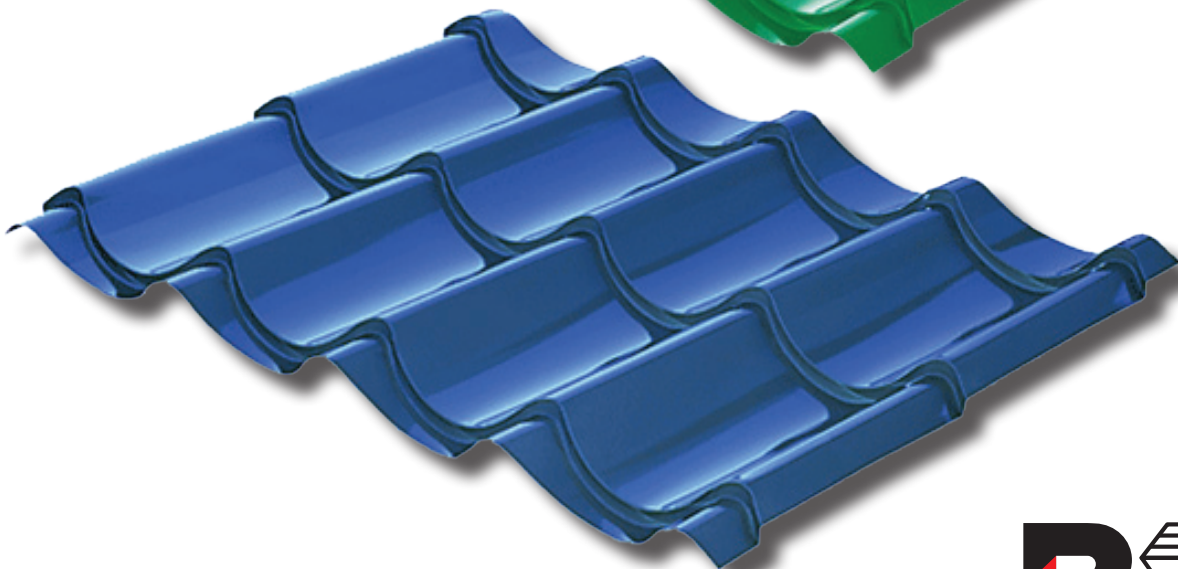


PRODUCT DESCRIPTION

- Latest development of tile effect metal roofing profile which reveals subtle charm and beauty
- Ideally suited as the best replacement for traditional clay tiles
- Protected with corrosion inhibitive treatments
- Minimized maintenance and extended durability
- Light weight and strong
- Minimum roof pitch of 8°
- Suitable for commercial and residential applications like shop offices, bungalows, government staff quarters, condominiums and hostels.

MATERIALS & COLOURS

- Clean Colorbond® Steel
- Zinalume® Steel
- Prima R Steel
- Pre-painted Galvanised Iron (PPGI)
- Zacs Painted

SECTIONAL PROFILE

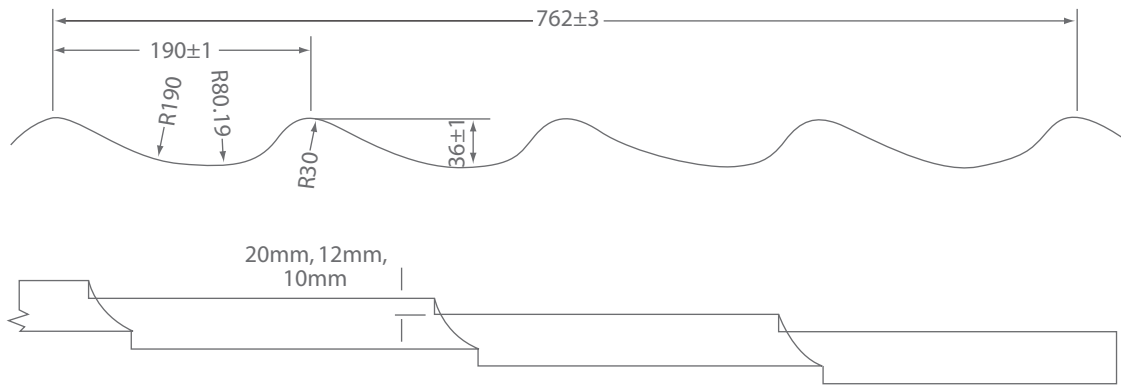

Dimensions

Rib height	: 36mm
Effective cover	: 762mm
Minimum roof pitch	: 8° Sheet w/o end lap

Tolerance

Thickness for material	: ± 0.03mm
Effective width	: ± 3mm
Finishing length	: ± 5mm

TECHNICAL INFO

AVAILABLE THICKNESS				
Coating Mass	Base Metal Thickness (BMT)	Total Coated Thickness (TCT)	Weight (Kg/m ²)	Min Yield Strength (MPa)
AZ 090	0.25mm	0.30mm	2.46	Min G300 MPa
AZ 090	0.30mm	0.35mm	2.93	Min G300 MPa
AZ 100	0.35mm	0.40mm	3.40	Min G300 MPa
AZ 100	0.40mm	*0.47mm	3.88	Min G300 MPa

*nTCT (Nominal Total Coated Thickness)

ROOFSEAL RESOURCES (M) SDN. BHD. (802531-A)

No. 1-A, Jalan 1/7, Seksyen 1, Bandar Teknologi Kajang, 43500 Semenyih, Selangor Darul Ehsan, Malaysia.
Tel: 603-8723 4776 (H/Line) Fax: 603-8723 4775 E-mail: enquiry@roofseal.com.my Website: www.roofseal.com.my