



INSTALLATION OF OM3

OM3 Panels are fixed onto the carrier Metal Bar (MB3, MB3-85/15 or MB3-135/15). The panels are installed right to left or vice-versa. The MB3 carrier has profiled flanges corresponding to the shape of the OM3 panels. The leg of the OM3 is first slotted into the carrier and then light pressure is applied on the panel to ensure that the OM3 is engaged firmly to the carrier.

OM3 100mm / 150mm

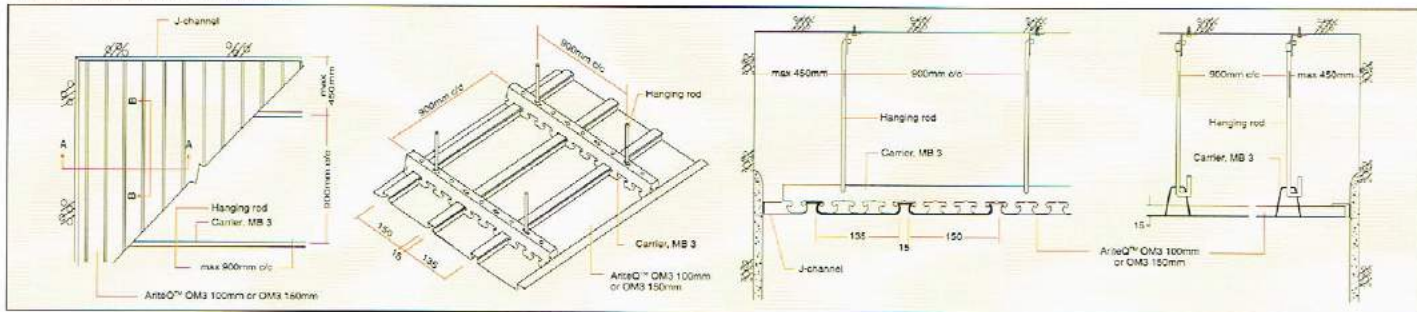

OM3 85Smm / 135Smm

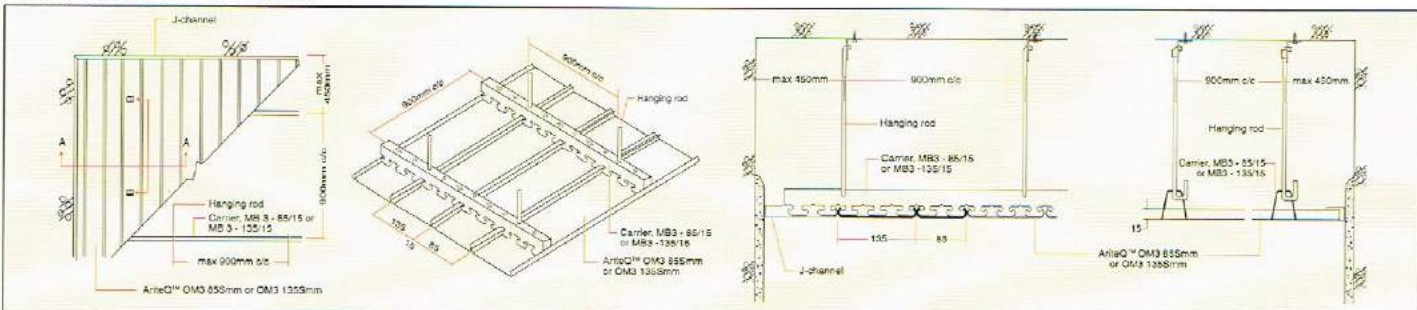

* Max. 600mm c/c for external. Max. 900mm c/c for internal. Spacing shall subject to actual site condition.

SAMPLE OF SPECIFICATION

AriteQ™ OM3 A/B 100mm (refer to profile), clip-on type metal strip ceiling in aluminium c/w polyester paint finish or pre-painted steel (refer to material available) in 0.55mm/0.48mm TCT (refer to material thickness). Panel profiles shall be 100mm wide x 15mm depth (refer to panel effective width & depth) to be clipped onto MB 3 carriers (refer to carrier) and come complete with wall trimmings and other accessories in accordance with manufacturer's instructions.

Important Note: Flat metal surfaces will display waviness commonly referred to as oil canning. This is caused by steel mill tolerances and is a characteristic, not a defect, of panels manufactured from light gauge metal. Oil canning will not be accepted as a cause for rejection.

PROJECT REFERENCE

