


# ROOFSEAL SPAN

Roofing  
Solutions  
Under  
One Roof

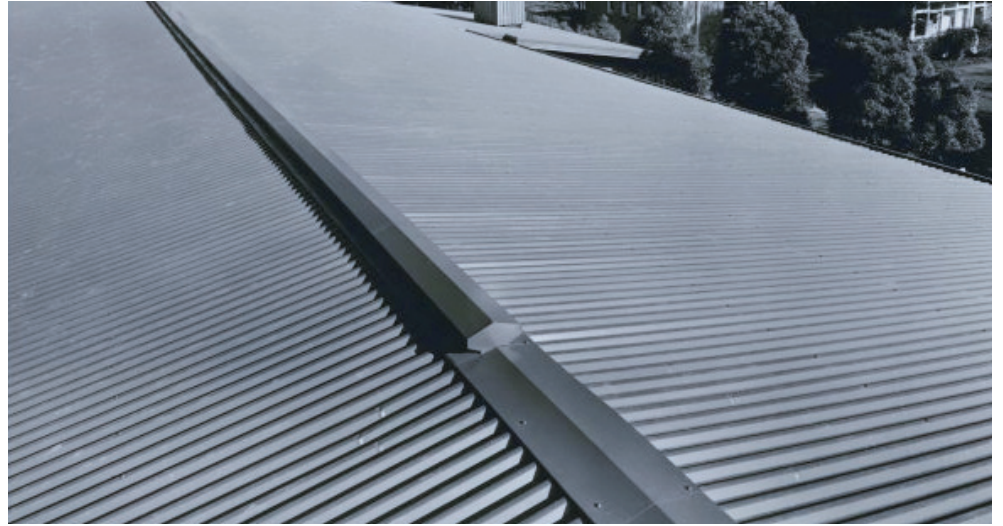

## PRODUCT DESCRIPTION

- Symmetrical trapezoidal ribbed roofing and wall cladding profile.
- Ideal for designs that require stronger, bolder and modern corrugated appearance.
- Excellent choice for contemporary roof and wall cladding designs.
- Ideal as fascia, feature wall, internal ceiling and soffit.
- Can be installed both horizontally and/or vertically.
- Minimum roof pitch of 3°
- Can be used in buildings that require long spans as it permits wider purlin spacing and utilizes fewer fasteners.
- Suitable for residential, commercial and industrial projects such as factories, condominium, cabin, hoarding, and etc.

## MATERIALS & COLOURS

- Clean Colorbond® Steel
- Zinalume® Steel
- Prima R Steel
- Pre-painted Galvanised Iron (PPGI)
- Zacs Painted

## SECTIONAL PROFILE



### Dimensions

Rib height	: 26mm*
Effective cover	: 925mm*
Minimum roof pitch	: 3° (1 in 20)

\*Other sizes available upon request

## TECHNICAL INFO

### AVAILABLE THICKNESS

Coating Mass	Base Metal Thickness (BMT)	Total Coated Thickness (TCT)	Weight (Kg/m <sup>2</sup> )	Min Yield Strength (MPa)
AZM150	0.42mm	0.47mm	4.63	Min G550MPa
AZM150	0.48mm	0.53mm	4.75	Min G550MPa

### MAXIMUM RECOMMENDED SPACING OF SUPPORTS

Type of Application		BMT - mm	
		0.42	0.48
Roof	Single	1500	2200
	End	2100	2400
	Internal	2300	3300
	Unstiffened Overhang	200	250
	Stiffened Overhang	450	500
Wall	Single	2200	2300
	End	3100	3200
	Internal	3300	3300
	Overhang	150	150

## ROOFSEAL RESOURCES (M) SDN. BHD. (802531-A)

No. 1-A, Jalan 1/7, Seksyen 1, Bandar Teknologi Kajang, 43500 Semenyih, Selangor Darul Ehsan, Malaysia.  
Tel: 603-8723 4776 (H/Line) Fax: 603-8723 4775 E-mail: enquiry@roofseal.com.my Website: www.roofseal.com.my